


KITAGAWA POWER CHUCKS
MODELS B, BT, B200, BT200, HOH, HOB, N, NL
SAMCHULLY POWER CHUCKS
1.5MM x 60° SERRATED




SOFT JAWS - STANDARD HEIGHT

CRITICAL

EXTRA HEIGHT

chuck size	part number	A	B	C	D	F	SCREW SIZE	G	PART NUMBER	B
5	D5SSH	2.38	1.50	1.00	0.393	0.748	8mm	0.50	not standard	
5	SB05C1 *	2.24	1.22	0.91	0.393	0.749	8mm	0.39	SB05C1053	2.09
6	D6SSH38	2.88	1.50	1.25	0.473	0.79	10mm	0.62	D6SEH38	3.00
8	D8SSH1	4.00	2.00	1.50	0.551	0.984	12mm	1.00	D8SEH1	4.00
10	D10SSH	4.63	2.00	1.50	0.63	1.187	12mm	1.00	D10SEH	4.00
12	D11SSH2	5.00	2.00	2.00	0.71	1.187	14mm	0.75	D11SEH2	4.00
12	D212SSH	5.50	2.50	2.00	0.827	1.187	16mm	1.00	D212SEH	4.00
15	D15SSH1	6.25	3.00	2.50	0.866	1.687	20mm	1.00	D15SEH1	4.00
15	D215SSH	6.25	3.00	2.50	1.004	1.687	20mm	1.00	not standard	
15	D15SEH1B6	6.25	6.00	2.50	0.866	1.687	20mm	1.00	D15SEH1	4.00

*POINTED ONLY; FOR OTHER POINTED JAWS, ADD "OP" TO THE END OF THE SQUARE JAW PART NUMBER, I.E. D5SSHOP

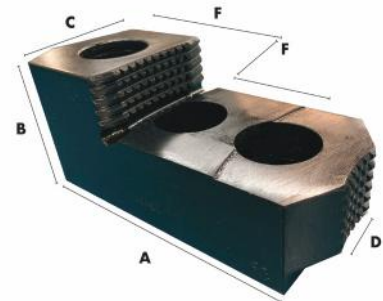

HARD JAWS - SINGLE STEP

CRITICAL

chuck size	part number	A	B	C	D	F	SCREW SIZE	step depth
5	HB05B1	2.19	1.22	0.91	0.393	0.709	8mm	0.51
6	D6SSH38RJ	2.85	1.50	1.13	0.473	0.79	10mm	0.48
8	D8SSH1RJ	3.16	1.98	1.50	0.551	0.984	12mm	0.75
10	D10SSHRJ	3.99	1.98	1.50	0.63	1.187	12mm	0.76
12	D11SSH2RJ	4.16	1.98	2.00	0.71	1.187	14mm	0.83
15	D15SSHRJ	5.88	2.48	2.50	0.866	1.687	20mm	0.93
15	D215SSHRJ	5.88	2.48	2.50	1.004	1.687	20mm	0.93

*ALUMINUM JAWS AVAILABLE


KITAGAWA POWER CHUCKS
MODELS B, BT, B200, BT200, HOH, HOB, N, NL
SAMCHULLY POWER CHUCKS
1.5MM x 60° SERRATED



HARD JAWS - DOUBLE STEP

CRITICAL

chuck size	part number	A	B	C	D	F	SCREW SIZE	1st step depth	2nd step depth
6	D6SSH38RJ2S	2.85	1.73	1.13	0.473	0.79	10mm	0.42	0.86
8	D8SSH1RJ2S	3.17	2.23	1.50	0.551	0.984	12mm	0.63	1.25
10	D10SSHRJ2S	3.99	2.73	1.50	0.63	1.187	12mm	0.75	1.50
12	D11SSH2RJ2S	4.16	2.48	2.00	0.71	1.187	14mm	0.68	1.36
12	D212SSHRJ2S	4.13	2.75	2.00	0.827	1.187	16mm	0.75	0.75
15	D15SSHRJ2S	5.88	2.98	2.50	0.866	1.687	20mm	0.75	1.54
15	D215SSHRJ2S	5.88	2.98	2.50	1.004	1.687	20mm	0.75	1.54



T-NUTS

CRITICAL

chuck size	part number	A	B	C	D	E	F	SCREW SIZE
5	TNS1100	1.18	0.61	0.55	0.394	0.217	0.709	8mm
6	DSH6.538M	1.44	0.87	0.69	0.472	0.295	0.79	10mm
8	DSH8-1	1.87	1.00	0.80	0.551	0.335	0.984	1 / 2-13
8	DSH8-1M	1.87	1.00	0.80	0.551	0.335	0.984	12mm
8	DSH208M	1.83	0.81	0.81	0.551	0.335	0.984	12mm
8	DSH81M	2.00	1.00	0.984	0.628	0.375	0.984	12mm
10	DSH10	2.05	1.00	0.87	0.629	0.335	1.187	1 / 2-13
10	DSH10M	2.05	1.00	0.87	0.629	0.335	1.187	12mm
10	DSH210M	2.01	0.85	0.89	0.629	0.335	1.181	12mm
10	DSH210	2.00	0.85	0.88	0.629	0.335	1.181	1 / 2-13
12	DSH12M	2.25	1.30	1.04	0.709	0.53	1.187	14mm
12	DTNS2204	2.19	1.09	1.16	0.827	0.45	1.181	16mm
15	DTNS1107	3.15	1.79	1.32	0.866	0.65	1.693	20mm
15	DSH153	3.15	1.50	1.33	0.863	0.750	1.960	3 / 4-10
21-24	DTN-HCH-21 / 24	3.939	1.772	1.476	.984	.748	2.362	20mm



KITAGAWA POWER CHUCKS

MODELS B, BT, B200, BT200, HOH, HOB, N, NL

SAMCHULLY POWER CHUCKS

1.5MM x 60° SERRATED

ALUMINUM PIE JAWS

chuck size (inches)	STANDARD HEIGHT			CRITICAL			EXTRA HEIGHT	
	part number	A	B	D	F	SCREW SIZE	part number	B
6	KTT6P	6.00	2.00	0.473	0.79	10mm	KTT6P1	4.00
8	KTT8P	8.00	2.00	0.551	0.984	12mm	KTT8P1	4.00
10	KTT10P	10.00	2.00	0.63	1.187	12mm	KTT10P1	4.00
12	KTT12P	12.00	2.00	0.71	1.187	14mm	KTT12P1	4.00
12	KTTB212P	12.00	2.00	0.827	1.187	16mm	KTTB212P1	4.00
15	KTT15P	15.00	3.00	0.866	1.687	20mm	KTT15P1	4.00

CAST IRON PIE JAWS

chuck size (inches)	STANDARD HEIGHT			CRITICAL			EXTRA HEIGHT	
	part number	A	B	D	F	SCREW SIZE	part number	B
6	CIKTT6P	6.00	2.00	0.473	0.79	10mm	CIKTT6P1	4.00
8	CIKTT8P	8.00	2.00	0.551	0.984	12mm	CIKTT8P1	4.00
10	CIKTT10P	10.00	2.00	0.63	1.187	12mm	CIKTT10P1	4.00
12	CIKTT12P	12.00	2.00	0.71	1.187	14mm	CIKTT12P1	4.00
12	CIKTTB212P	12.00	2.00	0.827	1.187	16mm	CIKTTB212P1	4.00
15	CIKTT15P	15.00	3.00	0.866	1.687	20mm	CIKTT15P1	4.00

*** SPECIAL SIZES AND DIAMETERS AVAILABLE!**